




# PRODUCT CARD

## Surge Protector LVT 530WA G-A\*

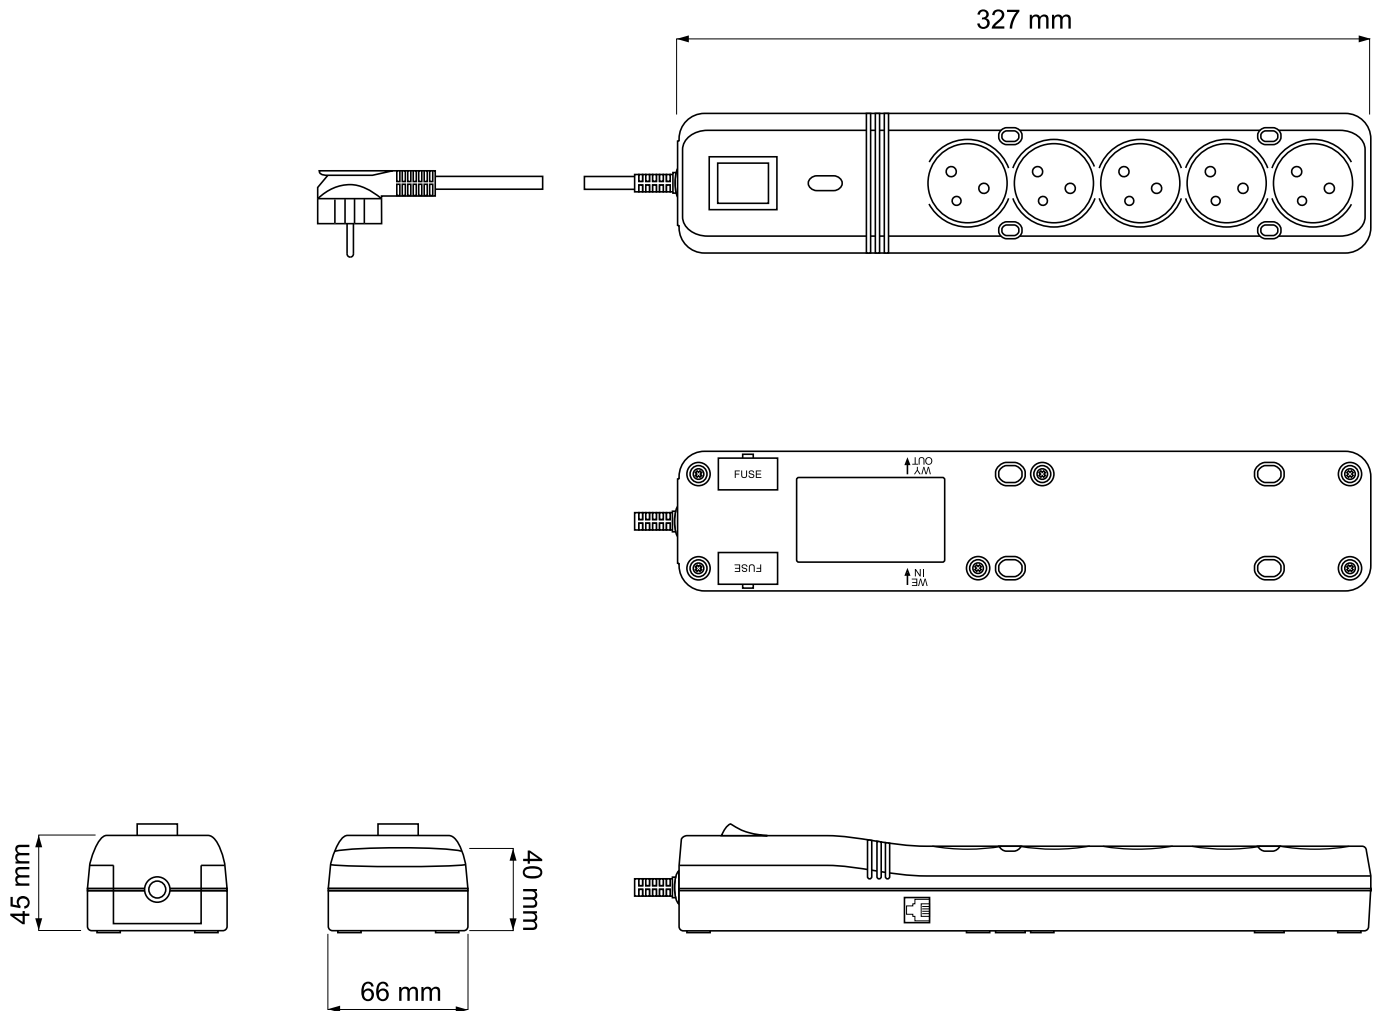

Technical Data:	
Continuous operating voltage $U_c$	~250V, 50Hz
Voltage rating $U_N$	~230V, 50Hz
Rated current $\Sigma I_N$	10A
Energy absorption Joules $\Sigma$	435J
Max. spike amperage $I_{MAX} \Sigma$	13,5 kA (8/20 $\mu$ s) 4,5kA(L/N), 4,5kA(L,N/PE)
Response time	<25ns
Outflow current	<0,5mA
Switch	Not illuminated
Fuse	2x10A/250V
Cable length	L-1,5÷5,0m

\* COLORS:  
GR - GREY  
BL - BLACK

DATE:	PREPARED:	CONFIRMED:	MODEL:	PAGE 1
			LVT 530WA G-A*	KK-10/EN